



浙江宝龙机电有限公司

Zhejiang Baolong M&E CO.,Ltd.

承认书

APPROVAL SHEET

版本号: A0

客户信息	客户名称 Customer				
	客户代码 Customer Code				
	项目名称 Project Name				
	料号 Part Number				
	客户承认签章 Customer Approval & Signatures				

宝龙机电	产品名称 Product Name	铁芯振动马达 Iron-cored vibration motor				
	产品型号 Product Model	BLC-441308				
	设计 Design	王晓江 WangXiaoJiang	审核 Check	刘勇强 Liu YongQiang	批准 Approval	兰德福 Lan De Fu

地址: 中国浙江省乐清市宁康东路 388 号

ADD: No. 388, Ningkang East Road, Yueqing City, Zhejiang Province, China

邮政编码/POST CODE: 325600

电话/PHONE: 0577-62578888

传真/FAX: 0577-62574808

网址/WEB: [HTTP://WWW.BAOLONG.COM](http://www.baolong.com)

邮箱/E-mail: BLJSB@BAOLONG.COM

ROHS/HF

产品规格书/Specifications	日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308	页码/Page : 2 / 17	版本/version:A0
- 目录/List -		
1. 封面	1/17	
2. 目录	2/17	
3. 更改记录/Change The Record	3/17	
4. 结构形式/Construction Form	4/17	
5. 适用范围/Scope Of Application	4/17	
6. 测试条件/Testing Condition	5/17	
7. 贮存环境/Storage Environment	5/17	
8. 电气特性/Electrical Characteristics	5/17~6/17	
9. 机械特性/Mechanical Characteristics	7/17~8/17	
10. 可靠性试验/Reliability Test	9/17~12/17	
11. 环保要求/Environment Protections	12/17	
12. 注意事项/Caution	12/17~14/17	
13. 外形图/Outside View	15/17	
14. 包装要求/Packaging require	16/17	
15. 实物图/The motor real figure	17/17	

产品规格书/Specifications	日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308	页码/Page : 4 / 17	版本/version:A0

4. 结构形式/Construction Form

本规格书适用于浙江宝龙机电有限公司制造的应用于移动电话的振动马达。

This datasheet sheet is stipulated for vibration motor, which is manufactured by Zhejiang Baolong M&E Co., Ltd. for mobile phone.

NO.	项目/Item	规格/Specifications
4-1	电机结构 Motor construction	Φ4.1 圆柱形铁芯直流电机 Φ4.1 DC Cored motor
4-2	换向片数 Number of phases	3 组换向片 3-phases
4-3	磁极数 Number of magnet poles	两极 (外置磁极型式) 2-poles (Inner magnet type)
4-4	线圈 Coil construction	铁芯线圈 Iron-cored coil
4-5	整流技术 Rectifying method	采用高精度电刷和换向器 Precious brush and commutator

5. 使用条件/Standard operating condition

NO.	项目/Item	规格/Specifications
5-1	额定电压 Rated voltage	DC2. 4V
5-2	使用电压范围 Operating voltage range	DC 2. 3~2. 6V
5-3	旋转方向 Rotating direction	CW / CCW
5-4	使用温度范围 Operating temperature range	-30℃ ~+70℃

产品规格书/Specifications	日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308	页码/Page : 5 / 17	版本/version:A0

6. 测试条件/Testing condition

NO.	项目/Item	规格/Specifications
6-1	温度 Temperature	20℃±2
6-2	湿度 Humidity	45% ~85%RH
6-3	电源电压 Power supply, voltage source	直流电源或电池 2.4V DC power supply or battery 2.4V
6-4	马达安放状态 Posture of motor	水平

7. 贮存环境/Storage environment

NO.	项目/Item	规格/Specifications
7-1	贮存温度 Storage temp	-40℃~+85℃
7-2	相对湿度 relative humidity	5%~95% (No condensation of moisture/无水汽凝结)

8. 电气特性/Electrical characteristic


NO.	项目/Item	单位 /Unit	规格/SPEC.	条件/Condition
8-1	额定转速 Rated speed	rpm	10000±2500	额定电压:DC 2.4V Rated voltage:DC 2.4V
8-2	额定电流 Rated current	mA	220Max	在额定电压和额定负载下测试 /Measure at rated voltage and rated load
8-3	启动电流 Starting current	mA	90Max	在额定电压下锁定振动轮, 测电机电流 (2/3R 极端电阻处, 不在电刷和整流子两点接触的位置) /Measure current at locked counter weight (R1.7 ×2.8) in rated voltage(2/3R R:1 extreme resisting rate,Not in the position when the brushes

产品规格书/Specifications		日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308		页码/Page : 6 / 17	版本/version:A0


				contact the commutator at the two contact points)
8-4	启动电压 Starting voltage	V	2.2Max	DC2.2V电压下，开/关为1个循环，共3个循环 On/off-1cycle, total 3cycles under DC2.2V
8-5	端子阻抗 Terminal resistance	Ω	单相 1phase: 15 ± 4	正极和负极之间 Between positive and negative
8-6	绝缘电阻 Insulation resistance	M Ω	10Min	测量机壳和引线之间。 测试电压直流100V。 Measuring between case and lead wire. Test voltage DC 100V


产品规格书/Specifications		日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308		页码/Page : 7 / 17	版本/version:A0

9. 机械特性/Mechanical characteristics

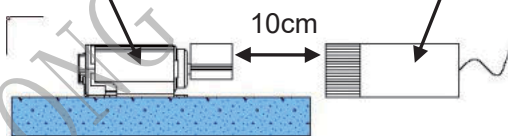NO	项目/Item	单位/Unit	规格/SPEC.	条件/Condition
9-1	外观 Appearance	/		目测/Visual
9-2	尺寸 size	mm	见外形图/See outline of drawing	使用游标卡尺和千分尺测量/Use vernier caliper and micrometer to measure
9-3	马达重量 Motor Weight	g	0.9±0.2g	使用天平测量/Use scale
9-4	机械噪音 Mechanical Noise	dB	50 MAX	振动马达 Vibration motor 拾音器 microphone  10cm 测试夹具 (75g) Testing Jig (75g) 马达: 被固定/Motor : be fixed 额定电压:DC 2.4V/Rated voltage : DC 2.4V 背景噪音: 25dB MAX. Back ground noise: 25dB MAX. 拾音器沿轴向正对电机平面 Microphone faces the plane of motor along the shaft


产品规格书/Specifications		日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308		页码/Page : 8 / 17	版本/version:A0

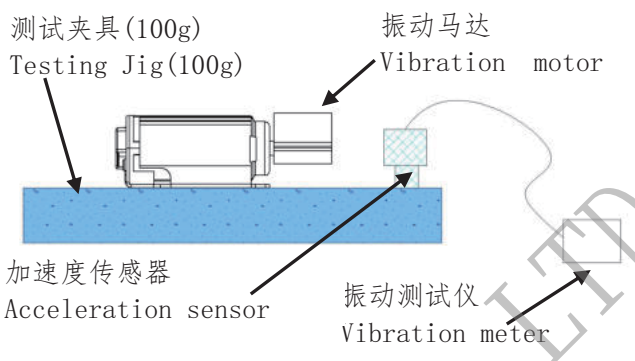9-5	振动量 Vibration Strength	Grms	0.75 MIN	 测试夹具(100g) Testing Jig(100g) 振动马达 Vibration motor 加速度传感器 Acceleration sensor 振动测试仪 Vibration meter 马达: 被固定/Motor : be fixed. 额定电压:DC 2.4/Rated voltage : DC 2.4V .
		Gp	1.06 MIN	

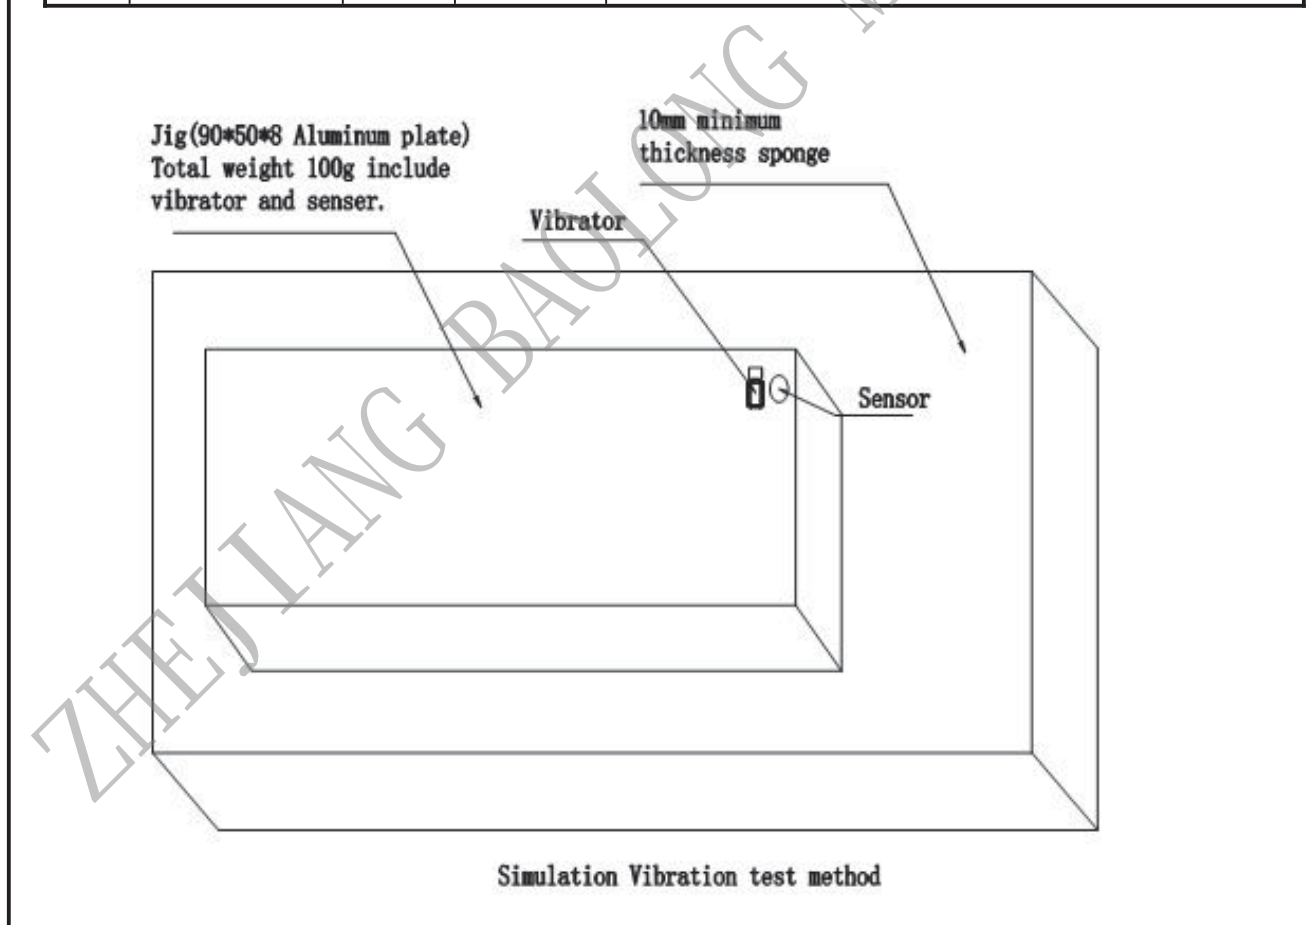

产品规格书/Specifications	日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308	页码/Page : 9 / 17	版本/version:A0

10. 环境试验/Environmental test

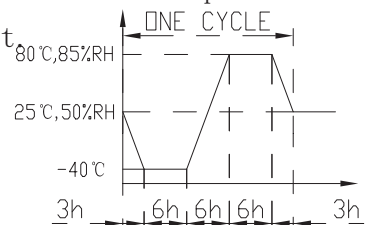NO	项目/Item	条件/Condition
10-1	高温贮存试验 High temperature Storage test	在+80℃的环境下放置96小时，然后在常温常湿下恢复4小时后测试。 Exposed at +80℃ for 96hours, then return to normal temperature and humidity for 4 hours before test.
10-2	低温贮存试验 Low temperature Storage test	在-40℃的环境下放置96小时，然后在常温常湿下恢复4小时后测试。 Exposed at -40℃ for 96hours, then return to normal temperature and humidity for 4 hours before test.
10-3	湿热试验 Humidity test	在温度40℃，湿度95%的环境下放置48小时，然后在常态下放置4小时后测试。/Resistan cetest 48hrs at 40℃,96%HR,then recovery 4hr at normal temperature.
10-4	高低温试验 Heat cycle test	确保电机在下图所示的条件下放置一个周期(马达表面避免有水汽凝结)，然后在室温下恢复4小时后，进行测试。/Confirmed to operating of motor during 1 cycles as following test condition (without presence of water droplets on the motor), then return to normal temperature and humidity for 6 cycle before test. 
10-5	振动试验 Vibration test	将马达固定在100g的塑料夹具上，按以下要求进行试验： 1) 振频范围:10-55Hz 2) 全振幅 2mm 3) 振频变化10-55-10 约1分钟 4) 振动方向:三个垂直方向 5) 持续时间:每个方向30分钟（共90分钟） The motor that is attached to a 100g jig (plastic housing) and test according following condition: 1)Vibration frequency range: 10~55Hz 2)Total amplitude: 2 mm 3)Sweep ratio: 10~55~10Hz approximate 1min 4)Direction of vibration: Three perpendicular directions 5)Duration: 30min(90min in total)

产品规格书/Specifications	日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308	页码/Page : 10 / 17	版本/version:A0

10-6	跌落试验 Drop test	将马达电机放在大约60g（包括电机）重的物体上,从1.5米的高度跌落到20mm厚的大理石板上，跌落18次。/Drop the motor from the height of 1.5 meters to the marble board of 20mm thick, Drop 18 times. 高度/Height: 1.5m 方向/Direction: $\pm X$, $\pm Y$, $\pm Z$ 次数/Times: 每一平面下落3次，共计18次/Three drops per plane for a total of 18 drops.
------	-------------------	--

判定标准/Judgment standard


产品规格书/Specifications	日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308	页码/Page : 11 / 17	版本/version:A0

10.1. 寿命试验/Life test

输入 2.4V 电压/Input voltage2.4V.

带负载重量 (R2.3, t4.0 大约 0.603g) /Load counter weight (R2.3, t4.0 appx0.603g).

NO	项目/Item	条件/Condition
10.1-1	常温寿命试验 /Room Temperature Life Test	放置在室温 $25\pm2^{\circ}\text{C}$, 50%RH 的湿度条件下/Room Temperature exposure $25\pm2^{\circ}\text{C}$, 50%RH .
10.2-2	高温寿命试验 /High temperature Exposure Life test	放置在高温 $55\pm2^{\circ}\text{C}$,50%RH 的条件下/High Temperature exposure $55\pm2^{\circ}\text{C}$,95%RH .
10.3-3	低温寿命试验 /Low temperature Exposure Life test	放置在高温 $-10\pm2^{\circ}\text{C}$ 的条件下/Low Temperature exposure $-10\pm2^{\circ}\text{C}$.

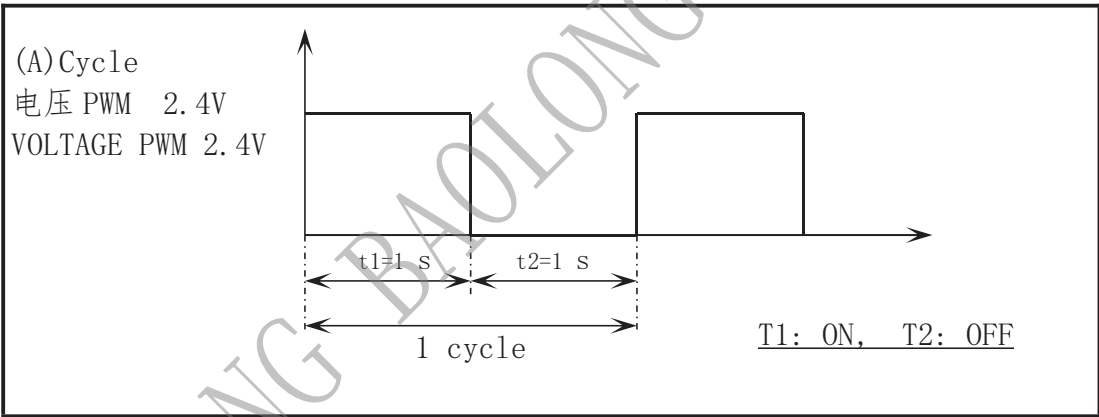

8-1-1 常温寿命试验/Room Temperature Life Test

1. 按A周期运行72小时/To maintain (A)cycle for 72hrs in the process of temperature shock.

8-2-1 高温寿命试验/High temperature Exposure Life test

1. 按A周期运行24小时/To maintain(A)cycle under high temperature for 24hrs.

8-3-1 低温寿命试验/Low temperature Exposure Life test

1. 按A周期运行24小时/To maintain(A)cycle under high temperature for 24hrs.

产品规格书/Specifications	日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308	页码/Page : 12 / 17	版本/version:A0

判定标准/Judgment standard

ZHEJIANG BAOLONG M&E CO LTD

产品规格书/Specifications	日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308	页码/Page : 13 / 17	版本/version:A0

12. 注意事项/CAUTION FOR USE

- (1) 该马达是微型精密产品，在运输过程中不要承受超过0.5 kgf的力，否则会引起外形或性能的变化。

As this motor is small and precise, do not press it over 0.5kgf force or while transportation, it can cause the transformation of performance or external appearance.

- (2) 请注意马达不要接触到液体性物质（比如：水，酒精等）

please be careful, not to be contacted fluid substances (such as: water, alcohol etc.)

- (3) 不要在高温下长时间放置，否则有可能导致电机的性能下降。

Do not expose the motor to high temperature for a long periods of time, it may cause a decline in performance.

- (4) 马达不要在以下环境中使用：

- 高温和高湿的场所
- 腐蚀性气体如H₂S、SO₂、NO₂等

Avoid using the motor in the following environment.

- High temperature and high humidity area.
- Corrosive gas such as H₂S、SO₂、NO₂ etc.

- (5) 请不要在靠近磁铁或带有磁场的仪器旁边使用或存放马达。

Please do not operate or store the motor adjacent to magnet or apparatus That has a magnetic field.

- (6) 请注意机壳的表面存在漏磁通量。

Please be careful that there exists a leaking magnetic flux on the surface of bracket.

- (7) 电刷和换向器的相互作用，有可能产生轻微的电噪音。

Due to interaction between brush and commutator, there is a possibility to occur electrical noise slightly.

产品规格书/Specifications	日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308	页码/Page : 14 / 17	版本/version:A0

(8) 如有任何问题，宝龙和客户双方应共同努力解决。

If any problems occur, both the user and baolong electron shall try to solve the problem.

(9) 因测试设备有误差，允许有±5%偏差。

Beacause there is error of the measurement equipment ,permit the standard of the rotational frepency to $\pm 5\%$

(10) 接电端子扭曲、折弯次数不可多于2次。

Current terminals should not be twisted or bent more than twice.

(11) 被焊锡的端子局部受压不可多于2次/The portion when lead wire and terminal are soldered should not be under stressed more than twice.

(12) 在马达通电时，不宜长时间锁住不转/Do not subject the motor under locked condition for long hours.

(13) 不可向马达一侧强行挤压接电端子/Do not exert pressure by pushing the current terminals towards the direction of the internal motor.

(14) 请在6个月内使用，在使用时和打开包装时，请避免水汽凝结。

Please use the motors within six months and prevent them from coagulation of moisture when open the pockage and use them.

(15) 马达通过ROHS认证

This motor pass the system of ROHS certification.

(16)

出厂检验报告附上35只马达特性数据和CPK值,其中包括:

负载转速: rpm

负载电流: m A

堵转电流 (启动电流): m A

启动电压: 不考虑CPK值

Out-going test data and Cpk data will be attached (n-35) for Loaded rotation r.p.m.

Loaded current mA


Lock current (Starting current) mA

Starting voltage V (without the consideration of Cpk value) .

产品规格书/Specifications	日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308	页码/Page : 16 / 17	版本/version:A0


14. 包装要求/Packaging require
 工作内容和程序/Content and process

1.Tray Packaging: Smallest Packing Condition Using HIPS tray

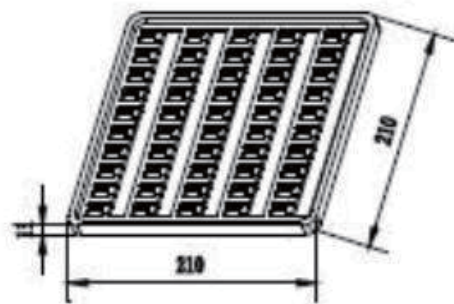


每盒装 100 只电机
 100 PCS motor to one box

2.Cardboard Packing Condition




每盒装 100 只电机
 100 PCS motor to one box




30 盒电机加一个盖板打包成一捆，每捆装 3000 只电机

30 PCS box motor with a flat pack into a bundle, each packed 3000 PCS motor

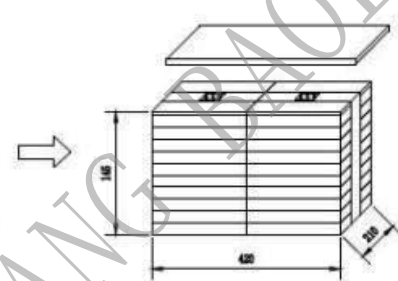

每 2 捆上方放一张纸片，装入防潮袋，共计 6000 只电机

Put a piece of paper, above every 2 bundle loading moisture bag, a total of 6000 Pcs motor

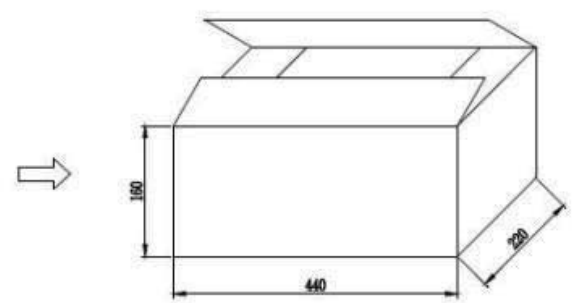

将装有 2 捆电机的防潮袋，放入纸箱内打包。共计 6000 只电机


Motor will be equipped with 2 bundle moisture bag, put the cartons package, a total of 6000 Pcs motor

产品规格书/Specifications	日期/Date :2019-07-22	
振动马达/Vibration motor:BLC-441308	页码/Page : 17 / 17	版本/version:A0

15. 实物图/The motor real figure



1. 喷码面朝上
The code up
2. 连接器拧半圈后放入吸塑盒
Connector twist after half a circle into the blister box
3. 黑色引线需要在如图视角的下方
Red need to lead in the Angle of view in the figure below

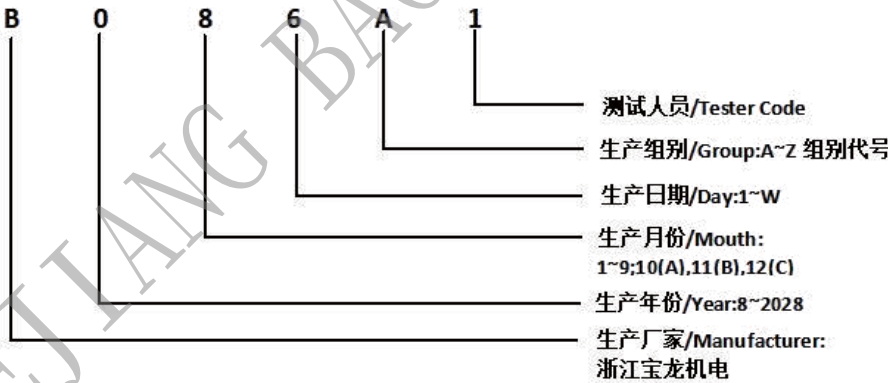

日期	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
代码	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G
日期	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
代码	H	I	J	K	L	M	N	P	Q	R	S	T	U	V	W	